

Power Output Ratings		50 Hz / 400 V	
Standby Power (ESP)	kVA	1257	
	kW	1006	
Prime Power (PRP)	kVA	1138	
	kW	910	

Engine			
Manufacturer		MTU	
Origin		GERMANY	
Model		18V2000G65	
No of Cylinder / Configuration		18 - V TYPE	
Displacement	lt	35,82	
Bore / Stroke	mm	130 / 150	
Compression Ratio		16:01	
Aspiration		Turbocharged and Intercooled	
Governor Type		ELEKTRONIC	
Cooling System		WATER	
Coolant Capacity	lt	TBD	
Lubrication Oil Capacity	lt	130	
Electrical System	VDC	24	
Speed / Frequency		1500 rpm / 50 Hz	
Engine Gross Power	kWm	1100	
Fuel Consumption	g/kWh	110 %	203
		100 %	200
		75 %	201
		50 %	217
Exhaust Outlet Temperature	°C	560	
Exhaust Gas Flow	m³/s	3,6	
Combustion Air Flow	m³/s	3,3	
Cooling Air Flow	m³/s	TBD	

Alternator		
Manufacturer		MARELLI
Origin		ITALY
Model		MJB400LA4
No of Phase		3
Power Factor		0,8
No of Bearing		SINGLE
No of Poles		4
No of Leads		6
Voltage Regulation (Steady State)		± %0,5
Insulation Class		H
Degree of Protection		IP 23
Excitation System		AVR (Automatic Voltage Regulator), Brushless
Connection Type		STAR
Total Harmonic Content (No Load)		< %2
Frequency	Hz	50
Voltage Output	VAC	230 / 400
Rated Power (Standby)	kVA	1265
Efficiency	%	95,6

	W x L x H (mm)	Weight (kg)	Fuel Tank (lt)	Noise dB(A)
Canopied	2468 x 6078 x 3500	15200	1762	TBA
Open Skid	1900 x 4600 x 2570	7672	1762	TBA





Standby Power

Standby power is defined as the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 500 hours of operation per year under average of 70% load. Overloading is not permissible.

Prime Power

Prime power is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hours.

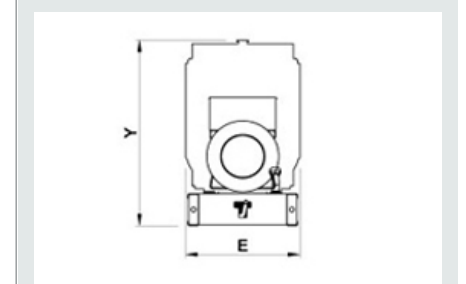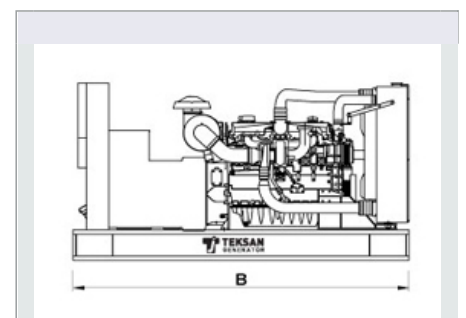

- Technical information and values are according to ISO8528, ISO3046, NEMA MG-1.22, IEC 60034-1, BS 4999-5000, VDE 0530 standards.

- Producing with ISO9001, ISO14001, OHSAS18001, TSE, CE standards.

- All information given in this leaflet is intended for general purposes only. Due to a policy continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sales.

TBA: To Be Ask

TBD: To Be Determined

NA: Not Available

N/A: Not Applicable

TTD1260MT5A0510-EN

www.teksangenerator.com

